


1100L PUMP STATION

SPECIFICATIONS

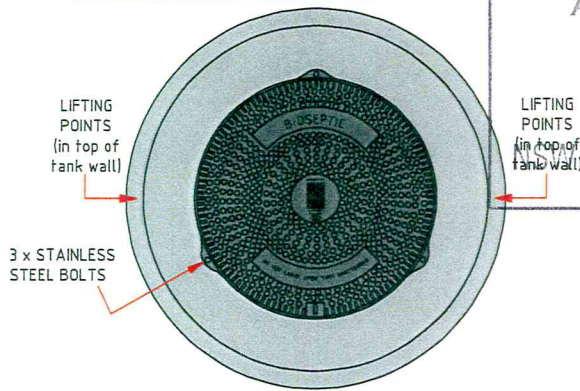

APPROVED

11 SEP 2013

LIFTING POINTS
(in top of tank wall)


1100L
Tank Capacity



Grinder Pump & High Water Alarm



PRODUCT GUIDE

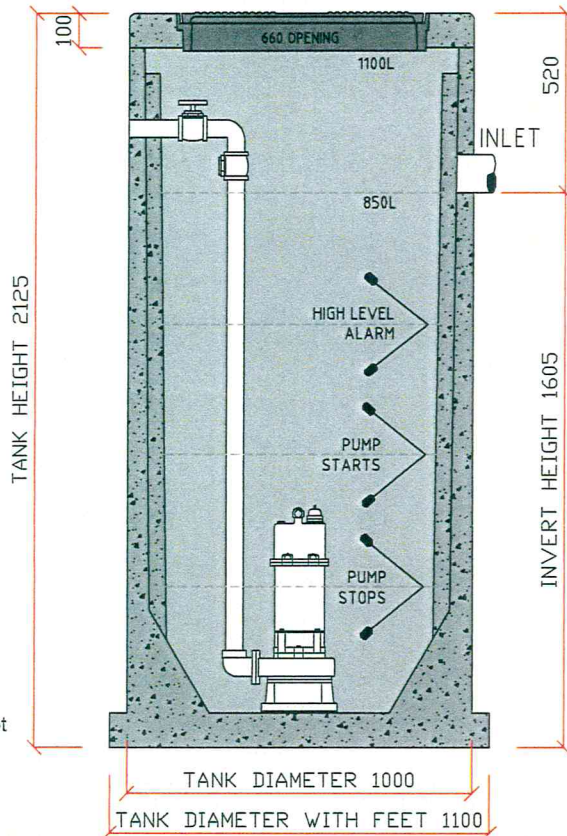

Total Capacity	1100L
Capacity Below Inlet	850L
High Level Alarm Operates	435L
Pump Starts	335L
Pump Cycle	200L
Tank Weight	1500kg
NSW Health Accredited	SEPS 016

WHEN BACKFILL IS SUITABLY PLACED AND COMPACTED IN ACCORDANCE WITH AS 3798-2007 THE PUMP STATION WILL HAVE A RESISTANCE TO FLOATING OF 3 KN.



AS1546.1
Lic SMK21556

DESCRIPTION	FEATURE	BENEFIT
1100 Litre Sewage Ejection Pump Station	30 Years Warranty on Concrete Components	Long Warranty Period Provides Peace of Mind
Australian Manufactured & Accredited to AS/NZS 1546.1:2008 - Septic Tanks	Wet Cast 40mpa Fibre Steel Reinforced Concrete Construction	Concrete is the Traditional Material for Septic Tanks & has been Proven to Last
Quality Assured by SAI Global, Lic. No SMK21556	New Generation Lockable & Sealed Composite Resin Access Cover, Weighing only 9 Kgs	Prevents Access by Children. Stronger than Steel of the Same Weight
NSW Health Certification of Accreditation 003-21556	510kgs Access Cover Loading Access Cover has 660mm Clear Opening	Easy to Lift. Provides good WHS compliance
BioSeptic has it's OWN Service Division for After Sales Service	Centrifugal Grinder Pump. Non Return and Gate Shut Off Valve	
Suitable for Domestic & Small Commercial Applications	High Water Audio/Visual Alarm with Mute Facility Mute Facility Resets after 2 Hours	

1300 658 111 | Fax: (02) 296 655 | sales@bioseptic.com.au | www.bioseptic.com.au
1-5 Anzac Avenue, Smeaton Grange, NSW, 2567 | PO Box 3250, Narellan, NSW, 2567
BioSeptic Pty Ltd ABN 95 056 461 226

