


BIOSEPTIC HI-FLO AWTS

SPECIFICATIONS

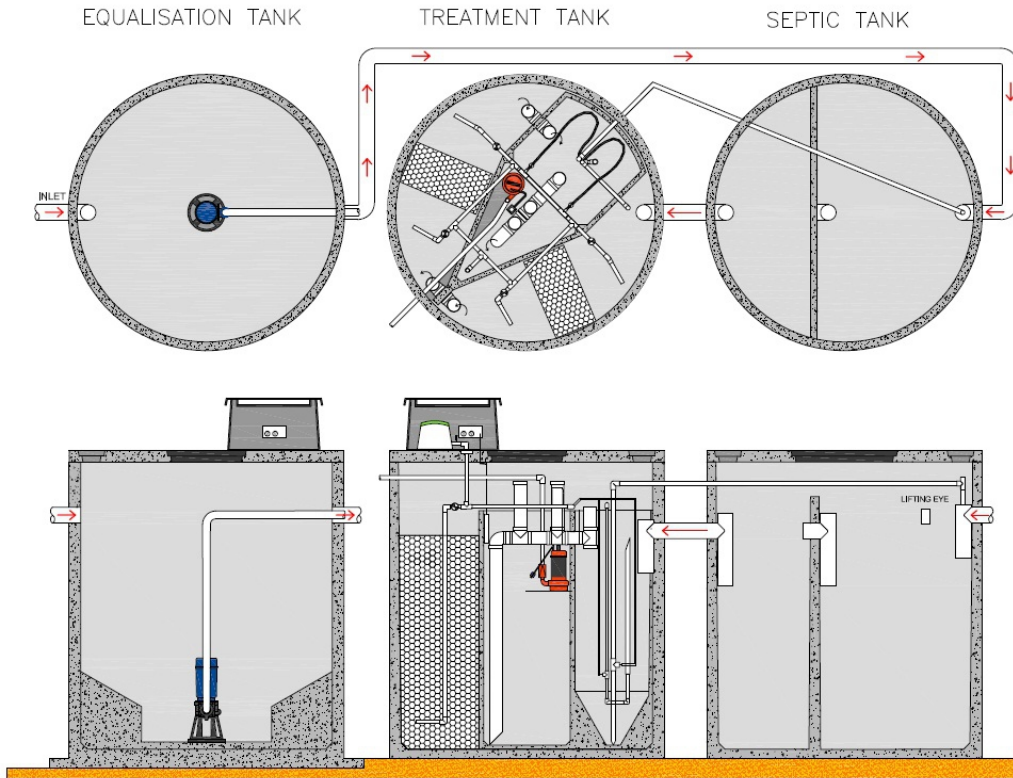

Certified Product

Australian Standard
 AS1546.1
 Lic SMK21556
 SAI Global

PRODUCT GUIDE

Septic Capacity	6950L
Treatment Tank Capacity	7200L
Equalisation Tank Capacity	7200L

Aeration Capacity	4800L
Clarifier Capacity	500L
Chlorine Contact Chamber	300L

Pump Chamber Capacity	100L
Surcharge Volume Capacity	1050L

DESCRIPTION

- Designed for larger developments such as schools, malls, resorts, camping grounds, hotels, factories, clubs etc.
- Designed to deal with high water loads over short periods of time
- Peak loads are stored in the equalisation tank and then metered into the treatment process
- Turns household wastewater into clear, odourless and safe water for your gardens and lawns
- Supported by the best customer service and after sales support
- In-house service department

FEATURES & BENEFITS

- Three tank design
- 30 years warranty - concrete components
- 5 year warranty - internal pipework
- 2 year warranty - pump and blower
- First year servicing included
- Testing revealed:
 - ✓ 97% reduction in organic waste
 - ✓ 98% reduction in suspended solids
 - ✓ 99.99% reduction faecal in coliforms
- Wet cast 40mpa steel fibre reinforced concrete construction with integrated baffle
- Stainless steel outlet filter
- Lockable composite resin access covers - prevents access by children
- Access cover weighs only 8.5kgs
- 510kgs access cover loading
- Suitable for pedestrian traffic only

1300 658 111 | Fax: (02) 4629 6655 | reception@bioseptic.com.au | www.bioseptic.com.au
 1-5 Anzac Avenue, Smeaton Grange, NSW, 2567 | PO Box 3250, Narellan, NSW, 2567
 BioSeptic Pty Ltd ABN 95 056 461 226



SEWAGE SYSTEMS