
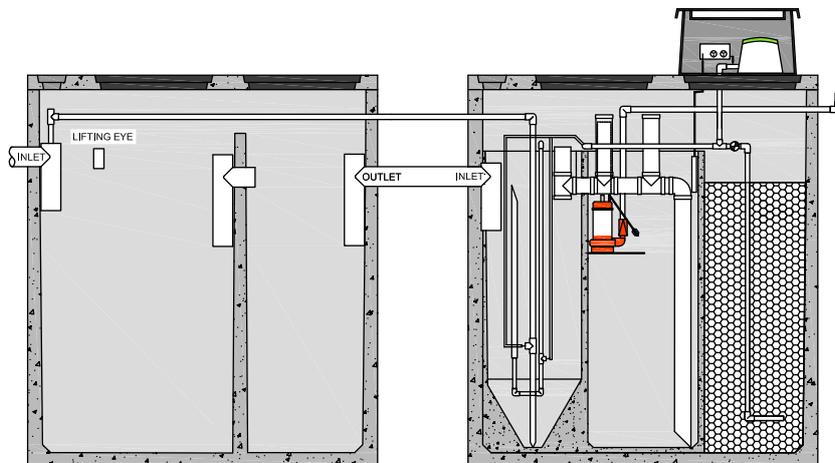


BIOSEPTIC JUMBO AWTS

SPECIFICATIONS

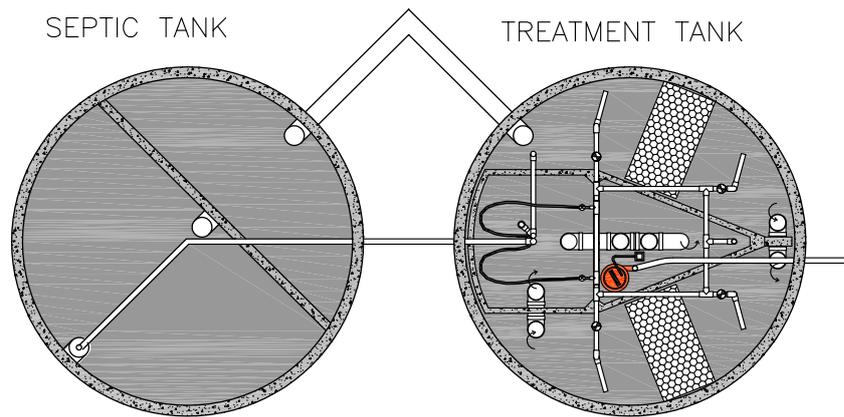

Australian Standard
AS1546.1
Lic SMK21556
SAI Global

PRODUCT GUIDE

3500L
Tested Daily
Treatment
Capacity



x23
on town
water supply



Septic Capacity	6950L
Treatment Tank Capacity	7200L
Aeration Capacity	4800L
Clarifier Capacity	500L

Chlorine Contact Chamber	300L
Pump Chamber Capacity	100L
Surcharge Volume Capacity	1050L

DESCRIPTION

- Designed for dual occupancies and small commercial applications with high loads over short periods
- Turns household wastewater into clear, odourless and safe water for your gardens and lawns
- Supported by the best customer service and after sales support
- In-house service department

FEATURES & BENEFITS

- Two tank design - proven performance for 20 years
- 30 years warranty - concrete components
- 5 year warranty - internal pipework
- 2 year warranty - pump and blower
- First year servicing included
- Testing revealed:
 - ✓ 97% reduction in organic waste
 - ✓ 98% reduction in suspended solids
 - ✓ 99.99% reduction faecal in coliforms
- Wet cast 40mpa steel fibre reinforced concrete construction with integrated baffle
- Stainless steel outlet filter
- Lockable composite resin access covers - prevents access by children
- Access cover weighs only 8.5kgs
- 510kgs access cover loading
- Suitable for pedestrian traffic only

1300 658 111 | Fax: (02) 4629 6655 | reception@bioseptic.com.au | www.bioseptic.com.au
1-5 Anzac Avenue, Smeaton Grange, NSW, 2567 | PO Box 3250, Narellan, NSW, 2567
BioSeptic Pty Ltd ABN 95 056 461 226



SEWAGE SYSTEMS