



# BIOSEPTIC PERFORMA AWTs

## SPECIFICATIONS

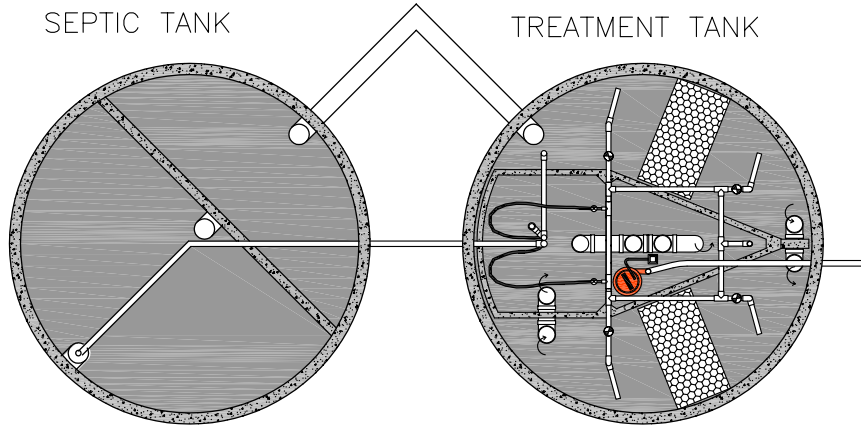

IT IS RECOMMENDED THAT THE TOP OF THE TANKS ARE A MINIMUM 100mm ABOVE FINISHED GROUND LEVEL

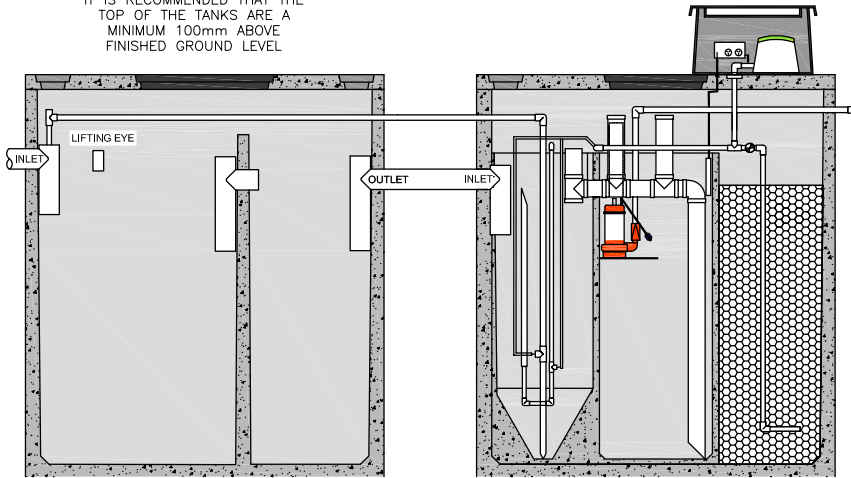

**2137L**  
Tested Daily  
Treatment  
Capacity

**x10**  
on town  
water supply

PRODUCT GUIDE

Septic Capacity	3550L
Treatment Tank Capacity	3750L
Aeration Capacity	2500L
Clarifier Capacity	500L

Chlorine Contact Chamber	300L
Pump Chamber Capacity	100L
Surcharge Volume Capacity	1050L
NSW Health Accredited	CofA 007



### DESCRIPTION

- Providing reliable treatment for over 7000 households for 20 years
- Turns household wastewater into clear, odourless and safe water for your gardens and lawns
- Supported by the best customer service and after sales support
- BioSeptic's own in-house service department

### FEATURES & BENEFITS

- 30 years warranty - concrete components
- 5 year warranty - internal pipework
- 1 year warranty - pump and blower
- 1st year servicing included
- Testing revealed:
  - ✓ 97% reduction in organic waste
  - ✓ 98% reduction in suspended solids
  - ✓ 99.99% reduction faecal in coliforms
- Wet cast 40mpa steel fibre reinforced concrete construction with integrated baffle
- Stainless steel outlet filter
- Lockable composite resin access covers - prevents access by children
- Access cover weighs only 8.5kgs
- 510kgs access cover loading
- Suitable for pedestrian traffic only

1300 658 111 | Fax: (02) 4629 6655 | [reception@bioseptic.com.au](mailto:reception@bioseptic.com.au) | [www.bioseptic.com.au](http://www.bioseptic.com.au)  
 1-5 Anzac Avenue, Smeaton Grange, NSW, 2567 | PO Box 3250, Narellan, NSW, 2567  
 BioSeptic Pty Ltd ABN 95 056 461 226



SEWAGE SYSTEMS