

# 2300L/6000L Combined Septic/Pump Out Tank



2300L/6000L combined septic/  
pump out tank



Weight 5400kg



To receive all wastes from a dwelling  
or other source and store it before  
disposal by:

- Periodic removal by vacuum tanker



**LOCKABLE & LIGHTWEIGHT**  
composite resin access covers:

- Weigh only 8.5kg and easy to lift
- Lockable with removable turnkey



Manufactured from 40mpa wet cast  
concrete with fibre steel reinforcing




80mm concrete lid:

- Reinforced with F82 steel mesh
- Top load limit – 510kg



Installation:

- Top of tank lid to be 100mm  
above finished ground level
- Provide 75mm level bed of  
aggregate under tank

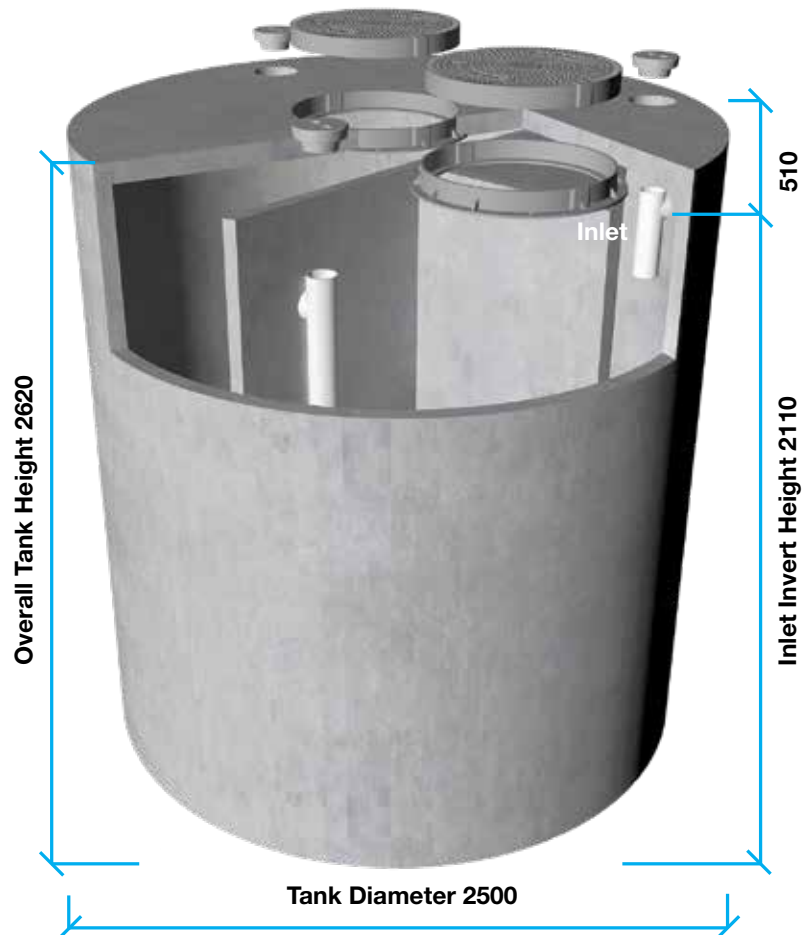

NSW Ministry  
of Health  
Certificate  
of Accreditation  
003-21556

67 Smeaton Grange Road,  
Smeaton Grange, NSW 2567  
EMAIL [sales@bioseptic.com.au](mailto:sales@bioseptic.com.au)  
ABN 95 056 461 226

# BIOSEPTIC

PHONE 1300 658 111