

## Entertainer AWTs with equalisation tank

### TECHNICAL DATA SHEET

- The BioSeptic Entertainer Aerated Wastewater Treatment System (AWTS) turns wastewater into clear, odourless, water for pumped disposal to vegetation for transpiration to the atmosphere.
- Reliable, high quality, Australian built concrete treatment system with concrete or polyethylene equalisation tank.
- Used for small accommodation and entertaining facilities such as small guest houses, camps and factories where there is an intermittent higher flow
- Designed to deal with high water loads over short periods of time.
- Can be installed as modular units allowing the treatment system to grow with the development.
- Uses equalisation tank to ensure better quality water treatment while allowing for fluctuations in wastewater generation.

#### FEATURES


- 30 Year Warranty - concrete components
- 2 Year Conditional Warranty - Pumps and Blowers
- Alarm System
- Chlorine Disinfection
- 1st Year Servicing Free if required
- Includes Basic Irrigation System
- Disposal pumps to match application
- Suits New and Existing Buildings
- Environmentally Friendly

#### TREATMENT CAPACITY

Treatment capacity varies with influent strength and flow pattern. BioSeptic can assist with designing the best system for any application.

#### SPECIFICATIONS

COMPONENT	DESCRIPTION
Septic tank	3550L baffled concrete tank with 2:1 division
Treatment tank	3750L consisting of: Two aeration chambers – 2 x 1250L
Equalisation or balance tank	Varies 1000L – 10,000L
Metering pump(s)	Cutter or vortex type. Can be single operation or two pumps in duty/standby mode Automatic pump controller Flow timer adjusted to suit application
Aeration	1 x 80l/min diaphragm air blower 240vac 48 watts 4 air diffusers
Bacterial support media	0.60m <sup>3</sup> providing 120m <sup>2</sup> of surface area
Clarifier	Surface area 0.5m <sup>2</sup> Waste activated sludge recycled to the septic tank
Rigid air lines	Schedule 40 PVC 20mm & 25mm
Flexible air lines	Polyethylene 13mm
Disposal/transfer pump	Drainer type. 240vac, 7 amps, 0.75kW
Control box	Plugs into a 3 pin outlet – 10 amps circuit

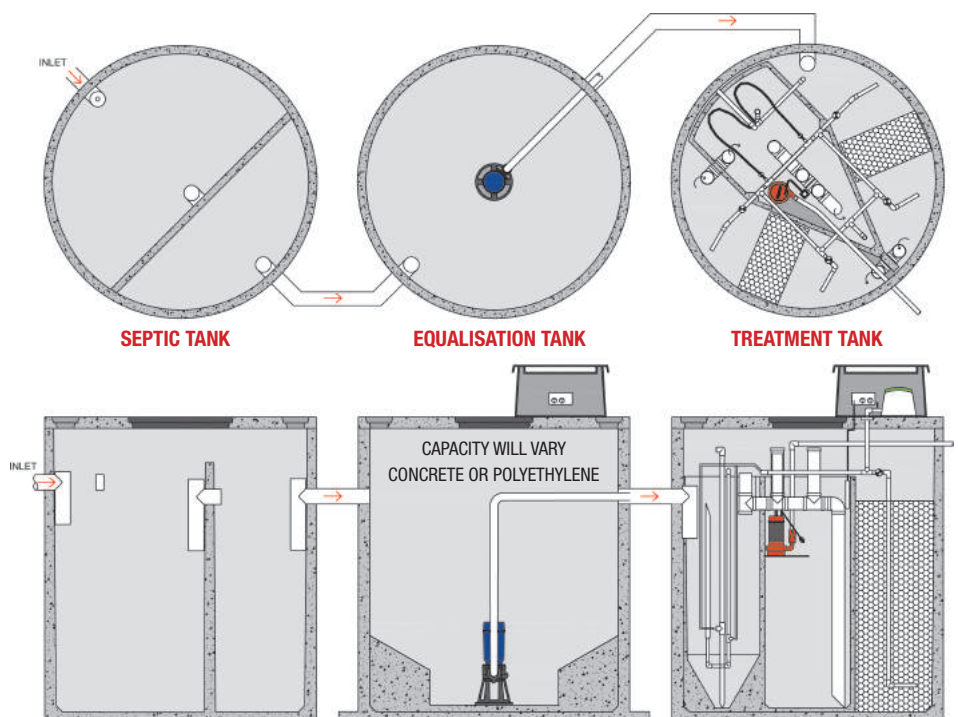

#### OTHERS SYSTEMS

BioSeptic Performa - single house

BioSeptic Jumbo - higher occupancy houses

BioSeptic Hiflow - larger establishments with dynamic flows