



7200Litre concrete collection well



Weight 4400kg



To collect sullage water from a septic tank for disposal by:

- Periodic removal by vacuum tanker
- Pump to disposal area/trench/sewer



LOCKABLE & LIGHTWEIGHT

composite resin access covers:

- Weigh only 8.5kg and easy to lift
- Lockable with removable turnkey



Manufactured from 40mpa wet cast concrete with fibre steel reinforcing




80mm concrete lid:

- Reinforced with F82 steel mesh
- Top load limit 510kg



Installation:

- Top of tank lid to be 100mm above finished ground level
- Provide 75mm level bed of aggregate under tank

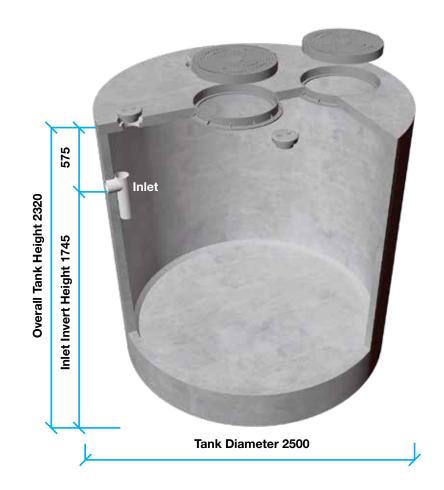



NSW Ministry of Health Certificate of Accreditation 003-21556

67 Smeaton Grange Road, Smeaton Grange, NSW 2567 EMAIL sales@bioseptic.com.au ABN 95 056 461 226



PHONE 1300 658 111